


# MMCC-1 Tuning Fork Crystals





## Precision 32.768 kHz quartz crystals for realtime applications

The majority of applications use a 32.768 kHz crystal in an oscillator circuit incorporating binary division to produce a 1 Hz output


\*MMCC-1-R

# OBSOLETE

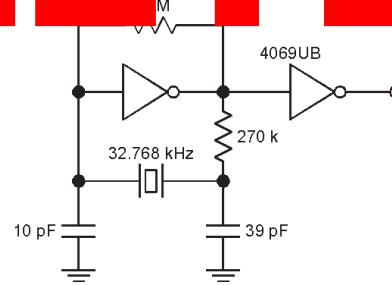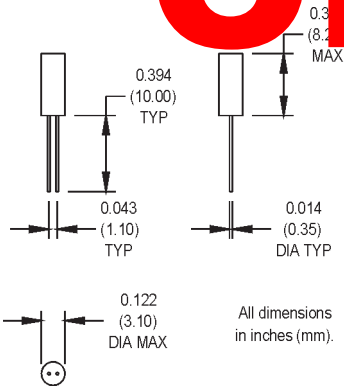

	PARAMETERS	VALUE
Electrical Specifications	Frequency	32.768 kHz
	Tolerance @ +25 °C	±30 ppm
	Aging	±3 ppm/yr. Max.
	Shunt Capacitance MMCC-1	1.60 pF, Typical
	Load Capacitance MMCC-1	12.5 pF, Typical
	Standard Operating Conditions	See Table 1
	Storage Temperature	-40 °C to +85 °C
	Equivalent Series Resistance (ESR), Max. MMCC-1	35 Kohms
	Resonance	Parallel
	Quality Factor	70,000 Min.
	Turnover Temperature	+25 °C to ±5 °C
	Parabolic Curvature Constant	-0.034 ppm/°C <sup>2</sup> , Typical
	Drive Level	1.0 μW Max.
	Environmental	Holder
Mechanical Shock		MIL-STD-202, Method 213, C
Vibration		MIL-STD-202, Method 201 & 204
Thermal Cycle		MIL-STD-883, Method 1010, B
Maximum Wave Soldering Conditions		+260 °C for 10 secs.

**Table 1**

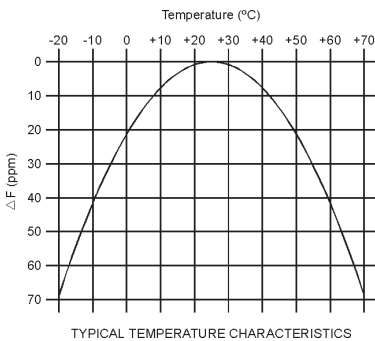

\* Series resonant designated by "SR" prefix (i.e., SRMMCC-1).  
Use MtronPTI part number 374-005 for ±20 ppm tolerance (MMCC-1).  
Contact the factory for specifications not listed.

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see [www.mtronpti.com](http://www.mtronpti.com) for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.