

OBSOLETE




MPV3 Series



9x14 mm, 3.3 Volt, LVPECL/LVDS, VCXO




- Versatile VCXO to 800 MHz with good jitter (3 ps typical)
- Used in low jitter clock synthesizers and SONET applications

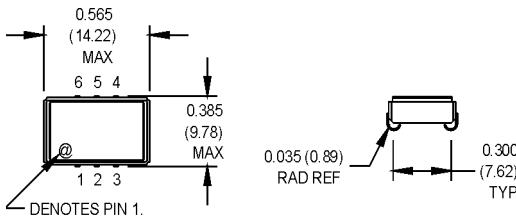

All dimensions in inches (mm).



SUGGESTED SOLDER PAD LAYOUT



Pin Connections

PIN	FUNCTION
1	Control Voltage
2	Enable/Disable or N/C
3	Ground/Case
4	Output Q
5	Output \bar{Q} or N/C
6	+Vcc

Ordering Information

Product Series	MPV3	1	0	R	1	L	J	-R	00.0000 MHz
Temperature Range	1: 0°C to +70°C		2: -40°C to +85°C		6: -20°C to +70°C		8: 0°C to +50°C		
Stability	0: Nominal per APR selection								
Output Type	R: Complementary, Enable Z: Complementary, w/o Enable								
Absolute Pull Range	1: ±50 ppm (±35 ppm typ. Stability) 2: ±100 ppm (±20 ppm typ. Stability) 5: ±80 ppm (±25 ppm typ. Stability) 8: ±25 ppm (±50 ppm typ. Stability)								
Symmetry/Output Logic Type	L: 45/55% LVDS P: 45/55% PECL H: 40/60% LVDS Q: 40/60% PECL								
Package/Lead Configurations	J: J-lead								
RoHS Compliance	Blank: non-RoHS compliant part -R: RoHS compliant part								
Frequency (customer specified)									

PARAMETER	Symbol	Min.	Typ.	Max.	Units	Condition/Notes
Frequency Range	F	0.75		800	MHz	
Operating Temperature	T _A	(See Ordering Information)				
Storage Temperature	T _S	-55		+125	°C	
Frequency Stability	ΔF/F	(See Ordering Information)				
Aging						See Note 1
1st Year		-3/-5		+3/+5	ppm	< 52 MHz / ≥ 52 MHz
Thereafter (per year)		-1/-2		+1/+2	ppm	< 52 MHz / ≥ 52 MHz
Pullability/APR		(See Ordering Information)				
Control Voltage	V _c	0.3	1.65	3	V	Pin 1 voltage
Linearity			5	10	%	Positive Monotonic Slope
Modulation Bandwidth	f _m	10			kHz	-3 dB bandwidth
Input Impedance	Z _{in}	50k			Ohms	
Input Voltage	V _{cc}	3.135	3.3	3.465	V	
Input Current	I _{cc}					
0.75 MHz to 26 MHz				60/30	mA	PECL/LVDS
26 MHz to 104 MHz				95/60	mA	PECL/LVDS
104 MHz to 800 MHz				105/60	mA	PECL/LVDS
Output Type						PECL/LVDS
Load		50 Ohms to V _{cc} -2 VDC				See Note 3
		100 Ohm differential load				PECL waveform LVDS waveform
Symmetry (Duty Cycle) (Per Symmetry Code)		(See Ordering Information)				V _{cc} -1.3 VDC (PECL) 50% of Waveform (LVDS)
Output Skew				200	ps	
Differential Voltage	V _o	250	340	450	mV	LVDS only
Logic "1" Level	V _{oh}	V _{cc} -1.02			V	PECL
Logic "0" Level	V _{ol}	V _{cc} -1.63			V	PECL
Rise/Fall Time	T _r /T _f		0.35	0.55	ns	@ 20/80% LVPECL
			.50	1.0	ns	@ 20/80% LVDS
Enable Function		80% V _{cc} min or N/C: output active 20% V _{cc} max: output disables to high-Z				
Start up Time		5			ps	
Phase Jitter	φ _J		3	5	ps RMS	Integrated 12 kHz - 20 MHz
Phase Noise (Typical)		10 Hz	100 Hz	1 kHz	10 kHz	100 kHz
@ 19.44 MHz		-60	-90	-112	-140	-150
@ 155.52 MHz		-60	-90	-112	-123	-120
@ 622.08 MHz		-60	-90	-108	-108	-105
						dBc/Hz

- Stability given for deviation over temperature.
- APR specification inclusive of initial tolerance, deviation over temperature, shock, vibration, supply voltage, and aging.
- PECL load - see load circuit diagram #5. LVDS load - see load circuit diagram #9.


MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.

OBSOLETE



MtronPTI Lead Free Solder Profile

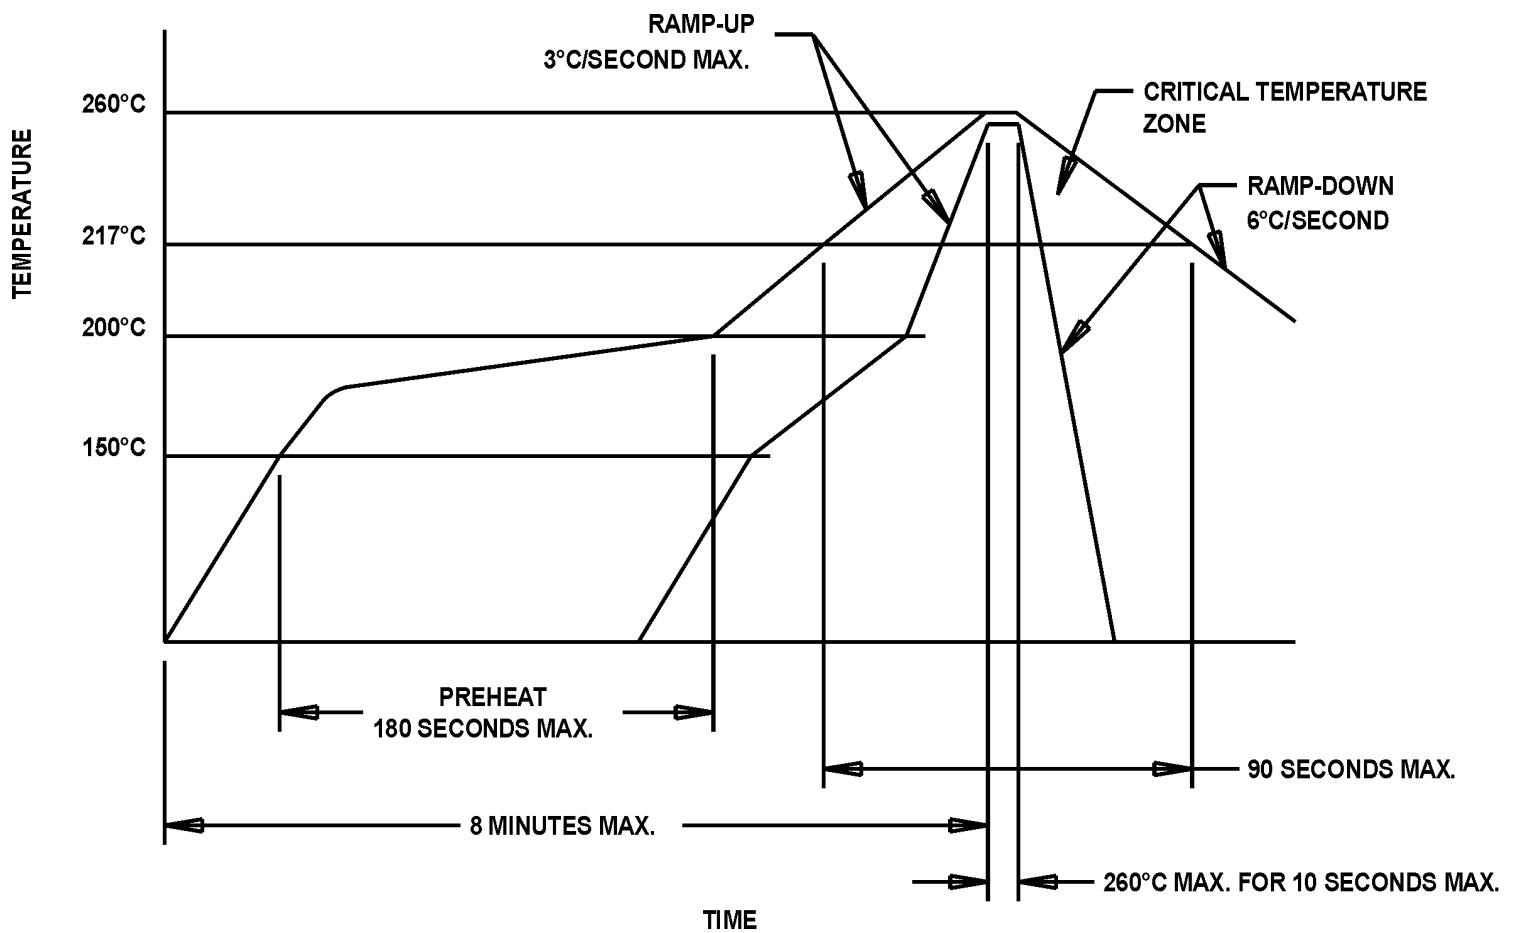

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.