

## SPECIFICATION FOR RoHS 6 COMPLIANT SMT CRYSTAL MtronPTI P/N M1253S108

### Electrical Specifications:

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Mode of Oscillation		Fundamental (AT-Cut)				
Frequency	F <sub>o</sub>		24.000000		MHz	
Frequency Tolerance	F/F	-30		+30	ppm	@ 25°C
Frequency Stability	ΔF/F	-50		+50	ppm	Over temperature range
Operating Temperature	T <sub>A</sub>	-40		+85	°C	
Aging		-5		+5	ppm	Per year @ +25°C
Load Capacitance	C <sub>L</sub>		32		pF	
Shunt Capacitance	C <sub>o</sub>			3	pF	
ESR				70	Ω	
Drive Level	D <sub>L</sub>	10	100	300	μW	


### Environmental Conditions:

Mechanical Shock	Per MIL-STD-202, Method 213, Condition C (100 g's, 6 ms duration, ½ sinewave)
Vibration	Per MIL-STD-202, Method 201 & 204 (10 g's from 10-2000 Hz)
Hermeticity	Per MIL-STD-202, Method 112 (1 X 10 <sup>-8</sup> atm cc/s of helium)
Thermal Cycle	Per MIL-STD-883, Method 1010, Condition B.
Solderability	Per EIAJ-STD-002
Package	4-pad 2.5 X 3.2 X 0.8 mm leadless ceramic. RoHS compliant.
Max. Soldering Conditions	See Figure 1

### Mechanical and Marking Information:


Part Marking	
Line 1	24M000
Line 2	MB y ww v

Line 2 Legend	
M	MtronPTI
B	M1253 Family
y	Year Mfgr.
ww	Work Week
v	Factory code

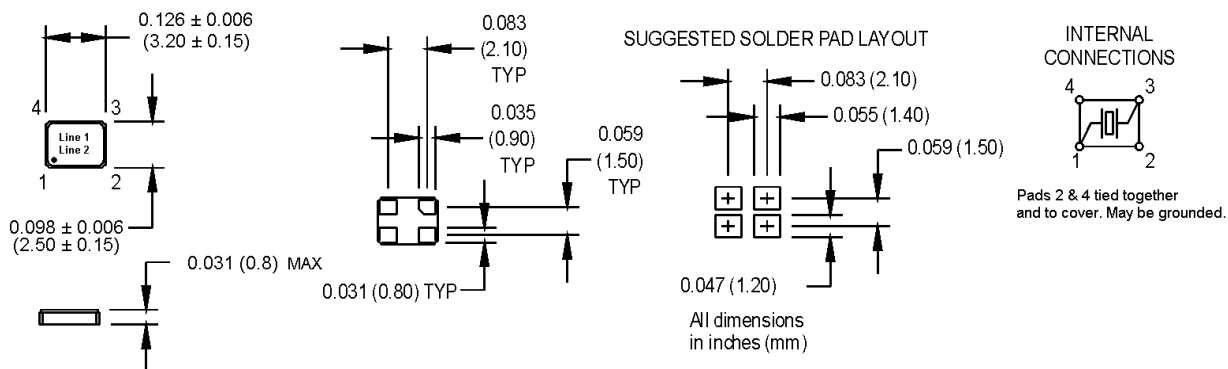



**SPECIFICATION FOR RoHS 6 COMPLIANT SMT CRYSTAL  
MtronPTI P/N M1253S108**

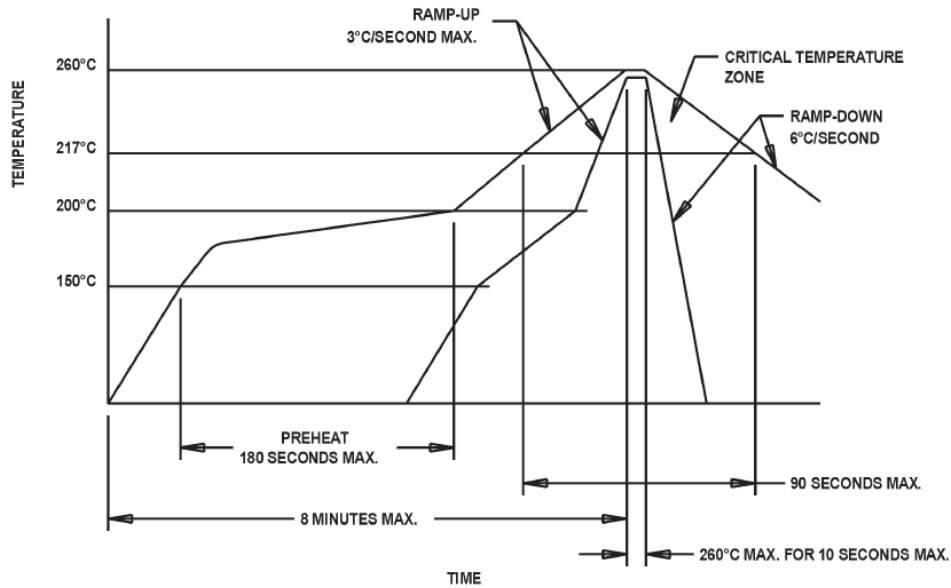

**Figure 1**

**DATA SHEET REVISION TABLE:**

Date	Rev.	Author	Details of Revision
6/29/11	0	WNJ	Original release.