

SPECIFICATION FOR RoHS 6 COMPLIANT SMT CRYSTAL MtronPTI Part Number M1253S207

Electrical Specifications:

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Mode of Oscillation		Fundamental (AT-Cut)				
Frequency	F _o		20.736000		MHz	
Frequency Tolerance	F/F	-10		+10	ppm	@ +25°C
Frequency Stability	ΔF/F	-10		+10	ppm	Deviation over operating temperature range
Aging	ΔF/F	-3		+3	ppm	1 st year, @ +25°C
Operating Temperature	T _A	-10		+60	°C	
Storage Temperature	T _S	-55		+125	°C	
Load Capacitance	C _L		8		pF	
Shunt Capacitance	C _o			3	pF	
ESR				50	Ω	
Drive Level	D _L		10	100	μW	
Insulation Resistance		500			MΩ	@ 100 V _{DC}

Environmental Conditions:

Mechanical Shock	Per MIL-STD-202, Method 213, Condition C (100 g's, 6 ms duration, ½ sinewave)
Vibration	Per MIL-STD-202, Method 201 & 204 (10 g's from 10-2000 Hz)
Thermal Cycle	Per MIL-STD-883, Method 1010, B (-55°C to 125°C, 15 min. dwell, 10 cycles)
Hermeticity	Per MIL-STD-202, Method 112 (1 x 10 ⁻⁸ atm cc/s of Helium)
Solderability	Per EIAJ-STD-002
Max. Soldering Conditions	See solder profile, Figure 1
Termination finish	0.3 to 1.0 micrometers of gold

SPECIFICATION FOR RoHS 6 COMPLIANT SMT CRYSTAL



MtronPTI Part Number M1253S207

Dimensions, Marking, and Pin Out Information:

Pad	Function
1	Input / Output
2	Cover / Ground
3	Input / Output
4	Cover / Ground

Part Marking	
Line 1	20M7360
Line 2	M B y ww v

Line 2 Legend	
M	MtronPTI
B	Part Series
y	Year
ww	Work Week No.
v	Factory code

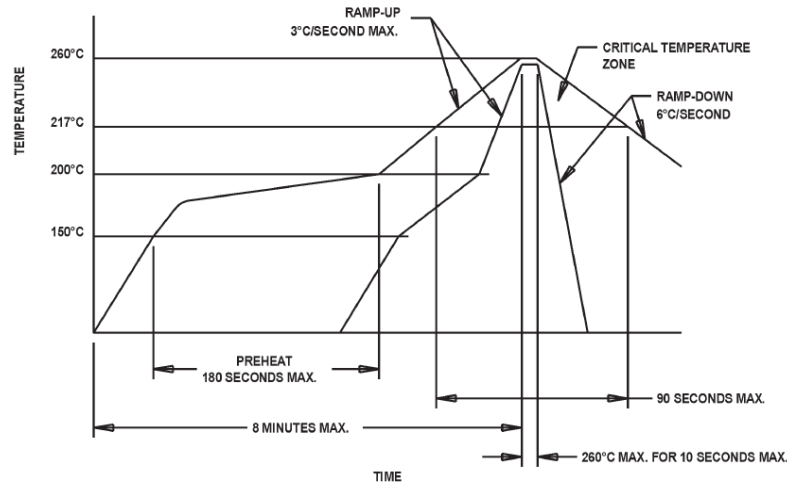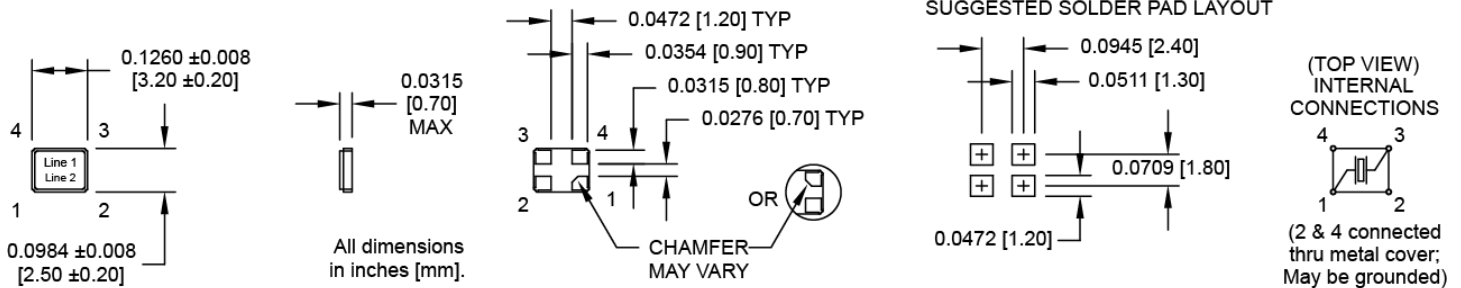

DATA SHEET REVISION TABLE:

Date	Rev.	Author	Details of Revision
05/14/18	0	MM	Original release.
11/06/18	A	MM	Corrected product frequency.