



1703 E. Highway 50 Yankton, SD 57078 USA  
 Phone: 800-762-8800 or 605-665-9321 Fax: 605-665-1709  
 Website: www.mtronpti.com



## SPECIFICATION FOR ROHS 6 COMPLIANT SMT CRYSTAL MtronPTI P/N M1253S227

### Electrical Specifications:

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Mode of Oscillation		Fundamental (AT-Cut)				
Frequency	F <sub>0</sub>		25.000000		MHz	
Frequency Tolerance	F/F	-10		+10	ppm	@ 25°C
Frequency Stability	ΔF/F	-25		+25	ppm	Over temperature range
Operating Temperature	T <sub>A</sub>	-20		+70	°C	
Aging		-5		+5	ppm	Per year @ +25°C
Load Capacitance	C <sub>L</sub>		18		pF	
Shunt Capacitance	C <sub>0</sub>			3	pF	
ESR				50	Ω	
Drive Level	D <sub>L</sub>	10	100	200	μW	

### Environmental Conditions:

Mechanical Shock	Per MIL-STD-202, Method 213, Condition C (100 g's, 6 ms duration, ½ sinewave)
Vibration	Per MIL-STD-202, Method 201 & 204 (10 g's from 10-2000 Hz)
Hermeticity	Per MIL-STD-202, Method 112 (1 X 10 <sup>-8</sup> atm cc/s of helium)
Thermal Cycle	Per MIL-STD-883, Method 1010, Condition B.
Solderability	Per EIAJ-STD-002
Package	4-pad 2.5 X 3.2 X 0.8 mm leadless ceramic. RoHS compliant.
Max. Soldering Conditions	See Figure 1


## SPECIFICATION FOR ROHS 6 COMPLIANT SMT CRYSTAL MtronPTI P/N M1253S227

### Mechanical and Marking Information:


Part Marking	
Line 1	25M000
Line 2	MB y ww v

Line 2 Legend	
M	MtronPTI
B	Part Series
y	Year
ww	Work Week No.
v	Factory code

Pad	Function
1	Input / Output
2	Cover / Ground
3	Input / Output
4	Cover / Ground

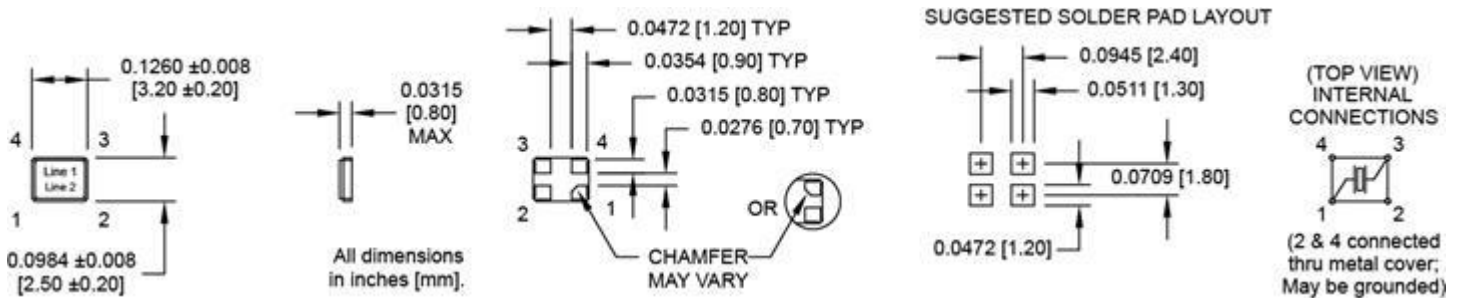

### Reflow Profile

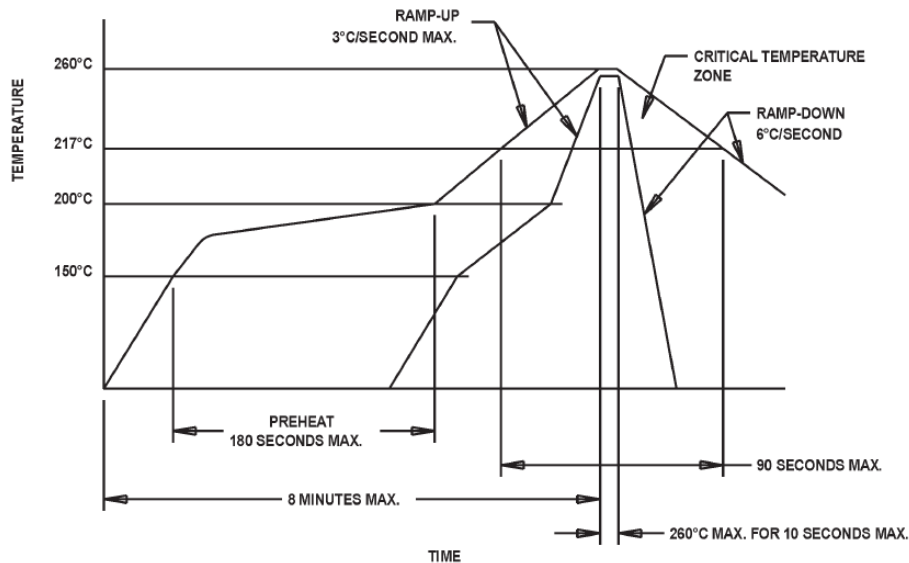

### DATA SHEET REVISION TABLE:

Date	Rev.	Author	Details of Revision
08-17-20	A	MM	Original release.