



1703 E. Highway 50 Yankton, SD 57078 USA
 Phone: 800-762-8800 or 605-665-9321 Fax: 605-665-1709
 Website: www.mtronpti.com



SPECIFICATION FOR ROHS 6 COMPLIANT SMT CRYSTAL MtronPTI P/N M1253S230

Electrical Specifications:

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Mode of Oscillation		Fundamental (AT-Cut)				
Frequency	F ₀		25.000000		MHz	
Frequency Tolerance	F/F	-30		+30	ppm	@ 25°C
Frequency Stability	ΔF/F	-30		+30	ppm	Over temperature range
Operating Temperature	T _A	-40		+85	°C	
Aging		-3		+3	ppm	1 st year @ +25°C
Load Capacitance	C _L		18		pF	
Shunt Capacitance	C ₀			5	pF	
ESR				30	Ω	
Drive Level	D _L	10	100	500	μW	

Environmental Conditions:

Mechanical Shock	Per MIL-STD-202, Method 213, Condition C (100 g's, 6 ms duration, ½ sinewave)
Vibration	Per MIL-STD-202, Method 201 & 204 (10 g's from 10-2000 Hz)
Hermeticity	Per MIL-STD-202, Method 112 (1 X 10 ⁻⁸ atm cc/s of helium)
Thermal Cycle	Per MIL-STD-883, Method 1010, Condition B.
Solderability	Per EIAJ-STD-002
Package	4-pad 2.5 X 3.2 X 0.8 mm leadless ceramic. RoHS compliant.
Max. Soldering Conditions	See Figure 1


SPECIFICATION FOR ROHS 6 COMPLIANT SMT CRYSTAL MtronPTI P/N M1253S230

Mechanical and Marking Information:


Part Marking	
Line 1	25M000
Line 2	MB y ww v

Line 2 Legend	
M	MtronPTI
B	Part Series
y	Year
ww	Work Week No.
v	Factory code

Pad	Function
1	Input / Output
2	Cover / Ground
3	Input / Output
4	Cover / Ground

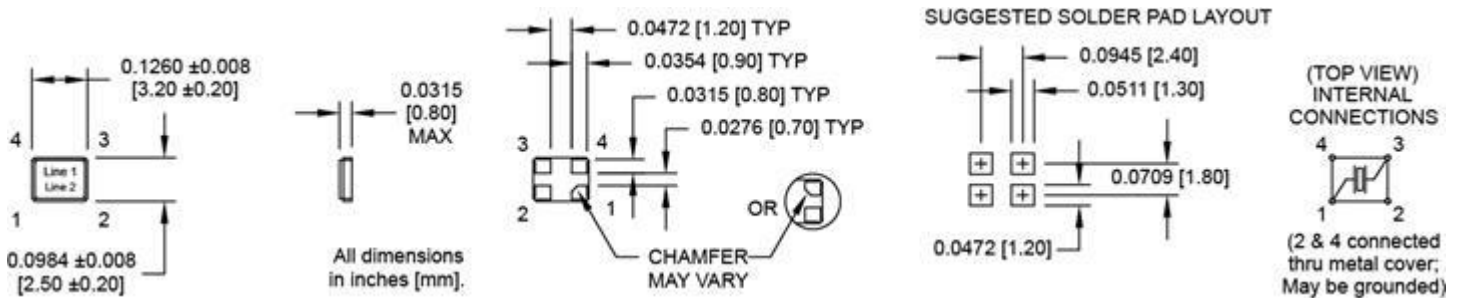

Reflow Profile

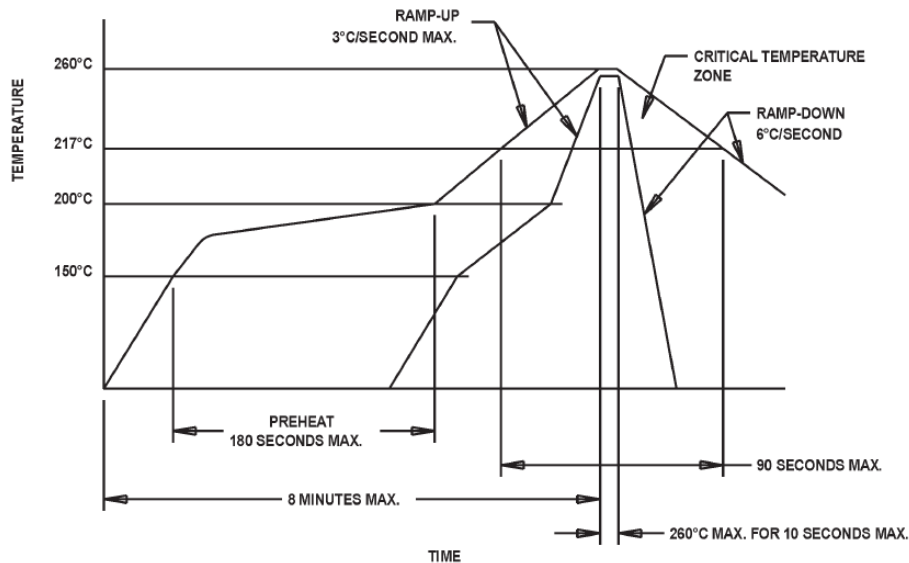

DATA SHEET REVISION TABLE:

Date	Rev.	Author	Details of Revision
02-03-21	A	MM	Original release.