

M1380 Series SPECIFICATION FOR 3.7x 8.0 mm THROUGH HOLE CRYSTAL

FEATURES

Suitable for wave or reflow soldering
Through Hole AT-cut crystal
Military Temperature Range
High Shock Resistance

APPLICATIONS

Avionics
Satellite communications
Test equipment

Ordering Information:


Product Family	Temperature Range		Tolerance at +25 °C		Stability		Load Capacitance		Frequency
	Code	Value	Code	Value	Code	Value	Code	Value	
M1380	2	-40 °C to +85 °C	M	± 50 ppm	M	± 50 ppm	Blank	20 pF (standard) Customer Specified (6 pF to 50 pF) Series resonant	XX.XXXXXX MHz
	4	-55 °C to +125 °C							
Example: M13802MM 20.000000 MHz									
M1380	2		M		M				20.000000 MHz

Electrical Specifications:

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Mode of Oscillation		Fundamental (AT cut)				
Frequency Range	F ₀	8.000		30.000	MHz	
Frequency Tolerance	ΔF/F	See Ordering Information Table			ppm	@ +25 °C
Frequency Stability	ΔF/F ₀	See Ordering Information Table			ppm	
Operating Temperature	T _A	See Ordering Information Table			°C	
Aging		-3		+3	ppm/year	@ +25 °C
Load Capacitance	C _L	See Ordering Information Table (standard is 20 pF)			pF	
Resistance	R _s		60	100	Ω	8.000 – 9.999 MHz
			50	85	Ω	10.000 – 11.999 MHz
			40	75	Ω	12.000 – 15.999 MHz
			35	60	Ω	16.000 – 19.999 MHz
			30	50	Ω	20.000 – 23.999 MHz
			30	40	Ω	24.000 – 30.000 MHz
Shunt Capacitance	C _O			4	pF	
Drive Level	D _L		100	500	μW	
Insulation Resistance		500			MΩ	

Environmental & Package Specifications:

Storage Temperature	-55°C to 125°C
Mechanical Shock	5000g, 0.3 ms, ½ sine
Vibration	20g / 10-2000 Hz
Gross Leak	Per MIL-STD-202, Method 112 (30 sec. Immersion)
Fine Leak	Per MIL-STD-202, Method 112 (1 x 10 ⁻⁸ atm cc/s of Helium)
Resistance to Solvents	Per MIL-STD-883, Method 2015
Solderability	Per EIAJ-STD-002
Max. Soldering Conditions	+260°C for 10 secs
Package	3.7 x 8.0 x 1.75 mm ceramic with leads




M1380 Series SPECIFICATION FOR 3.7x 8.0 mm THROUGH HOLE CRYSTAL

Marking:

Part Marking	
Line 1	xxMxxx
Line 2	M Y WW V

Legend	
M	MtronPTI
Y	Year
WW	Week
V	Vendor
xxMxxx	Frequency MHz

Dimensions:

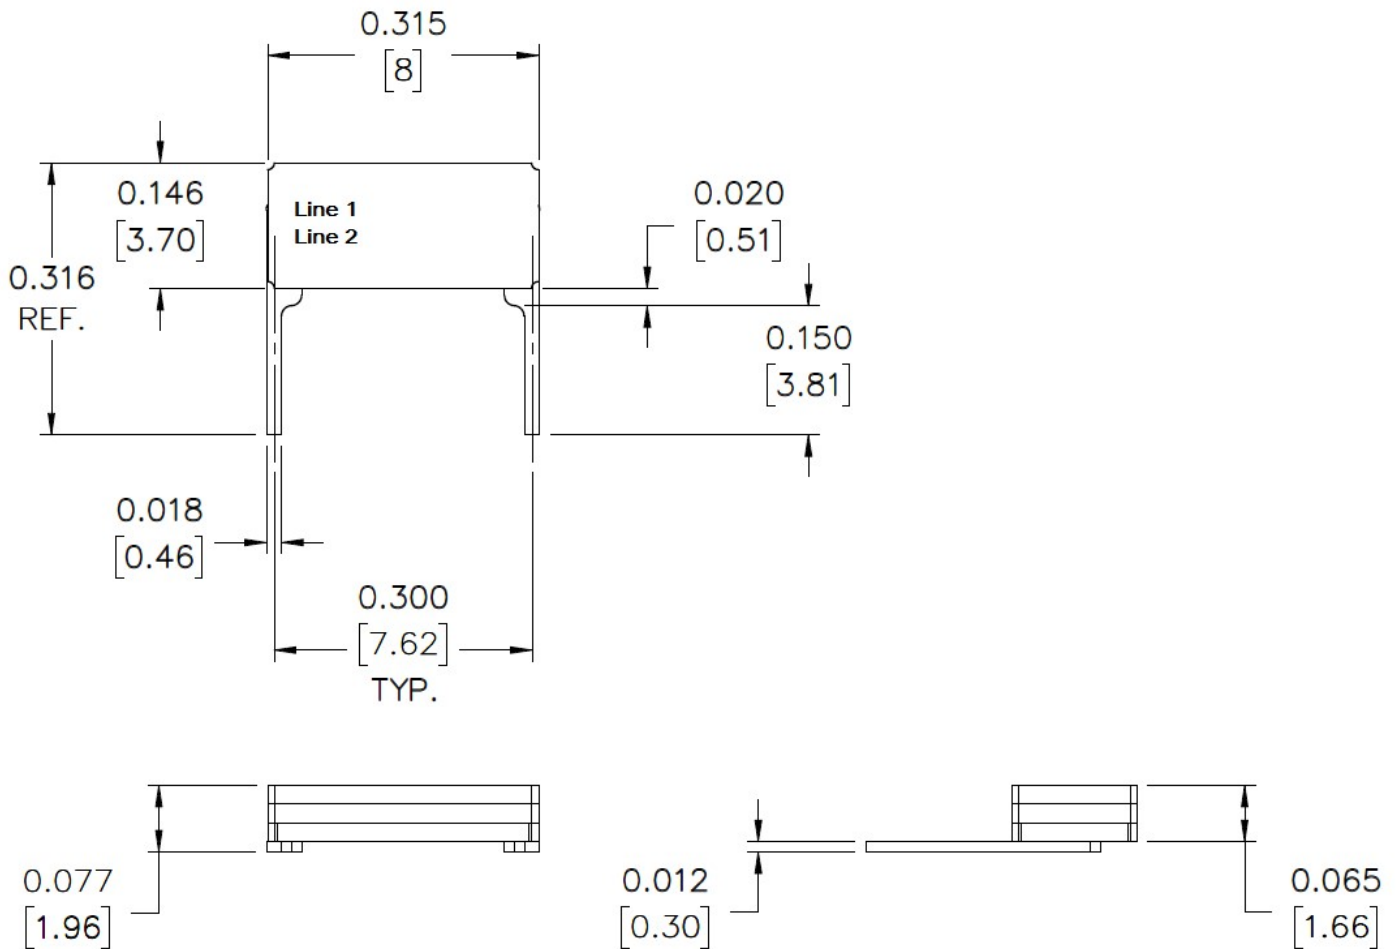

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice.
No liability is assumed as a result of their use or application.

Rev.0_08/23/17