



**SPECIFICATION FOR EXTENDED TEMPERATURE SMT OSCILLATOR**  
**MtronPTI P/N M2002T155**

**Electrical Specifications:**

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Frequency of Operation	F <sub>O</sub>		50.000000		MHz	
Frequency Stability	ΔF/F	-100		+100	ppm	Inclusive of initial tolerance at +25°C, deviation over temperature, variations due to shock, vibration, load, voltage and 1 <sup>st</sup> year aging at +25°C.
Operating Temperature	T <sub>A</sub>	-55		+125	°C	
Storage Temperature	T <sub>S</sub>	-55		+125	°C	
Operating Voltage	V <sub>dd</sub>	3.135	3.3	3.465	V	
Operating Current	I <sub>dd</sub>			35	mA	
Output Type		HCMOS/TTL Compatible				
Output Load				15/10	pF/TTL	
Symmetry		45		55	%	Ref. to ½ V <sub>dd</sub>
Logic "1" Level	V <sub>OH</sub>	90% V <sub>DD</sub>			V	
Logic "0" Level	V <sub>OL</sub>			10% V <sub>DD</sub>	V	
Output Current	I <sub>OH</sub>			-8	mA	
	I <sub>OL</sub>			+8	mA	
Rise/Fall Time				3	nS	10% to 90% Waveform
Tri-State Function		80% V <sub>DD</sub> or N/C			V	Pad 1: Output Enabled
				20% V <sub>DD</sub>	V	Pad 1: Output Disabled to high-Z
Start-Up Time				5	mS	
Random Jitter			5	12	pS	1-Sigma

**Environmental & Mechanical Requirements:**

Mechanical Shock	Per MIL-STD-202, Method 213, Condition C
Vibration	Per MIL-STD-202, Method 201 & 204
Hermeticity	Per MIL-STD-202, Method 112 (1 x 10 <sup>-8</sup> atm cc/s of Helium)
Thermal Cycle	Per MIL-STD-883, Method 1010, Condition B
Solderability	Per EIAJ-STD-002
Max. Soldering Conditions	See solder profile, Figure 1
Package Type	4-pad 5.0 X 7.0 X 1.9 mm leadless ceramic. RoHS compliant.



## SPECIFICATION FOR EXTENDED TEMPERATURE SMT OSCILLATOR MtronPTI P/N M2002T155

### Dimensions, Marking, and Pin Out Information:

Pad	Function
1	Tristate
2	Ground
3	Output
4	+V <sub>DD</sub>

Part Marking	
Line 1	M2002T155
Line 2	50M0000
Line 3	M yy ww vv

Legend	
yy	Year
ww	Work week
vv	Factory code

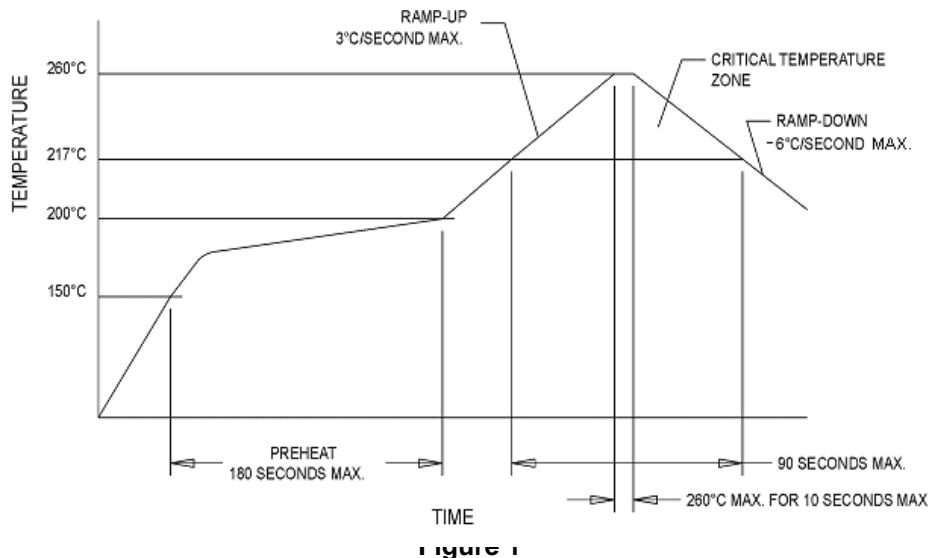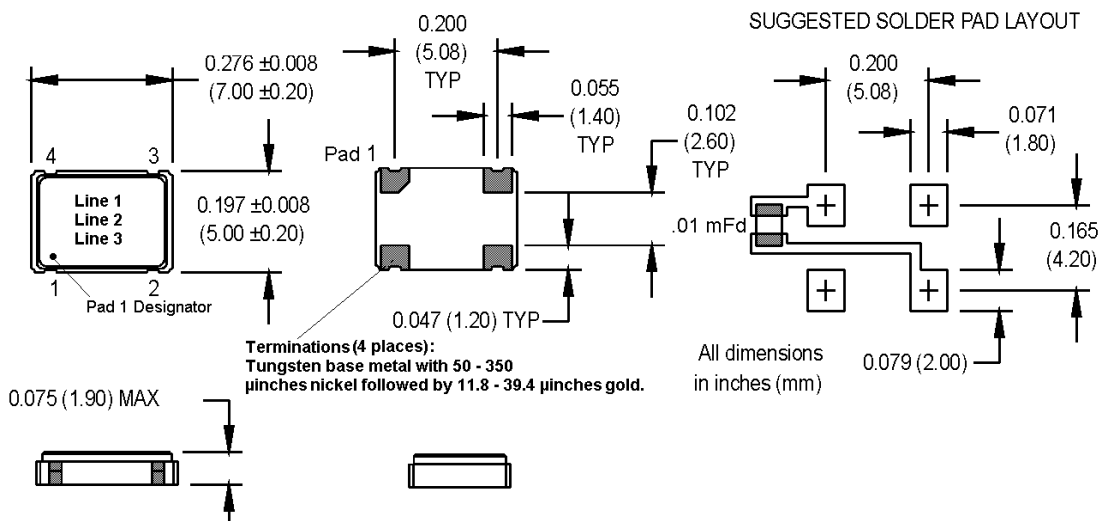

### Data Sheet Revision Table:

Date	Rev.	Author	Details of Revision
01/18/13	0	LEO	Original release.