

SPECIFICATION FOR HCMOS COMPATIBLE SMT OSCILLATOR MtronPTI P/N M2532S096

Electrical Specifications:

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Frequency of Operation	F _o		27.000000		MHz	
Frequency Stability	ΔF/F	-100		+100	ppm	Includes calibration @ +25 °C, deviation over operating temperature range, shock, vibration, supply voltage and 1st year aging.
Operating Temperature	T _A	-40		+95	°C	
Storage Temperature	T _S	-55		+125	°C	
Operating Voltage	V _{DD}	3.135	3.3	3.465	V	
Operating Current	I _{DD}			20	mA	
Output Type		HCMOS Compatible				
Output Load				15	pF	
Symmetry (duty cycle)	t _{DC}	45		55	%	Ref to ½ V _{DD}
Logic "1" Level	V _{OH}	90% V _{DD}			V	HCMOS load
Logic "0" Level	V _{OL}			10% V _{DD}	V	HCMOS load
Rise/Fall Time	t _R /t _F			10	ns	From 10% to 90% V _{DD}
Startup Time	t _{SU}		4	10	ms	
Tristate Function		Logic "1" or floating Logic "0"				Pad 1: Enables output. Pad 1: Disables output to a high impedance.
Random Jitter			4	10	ps RMS	1 Sigma

Environmental & Mechanical Requirements:

Mechanical Shock	Per MIL-STD-202, Method 213, Condition C (100 g, 6 ms duration, ½ sine wave)
Vibration	Per MIL-STD-202, Method 201 & 204 (10 g from 10 Hz to 2000 Hz)
Thermal Cycle	Per MIL-STD-883, Method 1010, B (-55 °C to 125 °C, 15 min. dwell, 10 cycles)
Hermeticity	Per MIL-STD-202, Method 112 (1 x 10 ⁻⁸ atm cc/s of Helium)
Solderability	Per EIAJ-STD-002
Max. Soldering Conditions	See solder profile, Figure 1
Package Type	4-pad 2.5 X 3.2 X 1.1 mm leadless ceramic. RoHS compliant. (M2532 Type)

SPECIFICATION FOR HCMOS COMPATIBLE SMT OSCILLATOR MtronPTI P/N M2532S096

Dimensions, Marking, and Pin Out Information:

Pad	Function
1	Tristate
2	Ground
3	Output
4	+V _{DD}

Part Marking	
Line 1	27M000
Line 2	M ymv

Legend	
y	Last digit of year
m	Letter code for month
v	Factory code

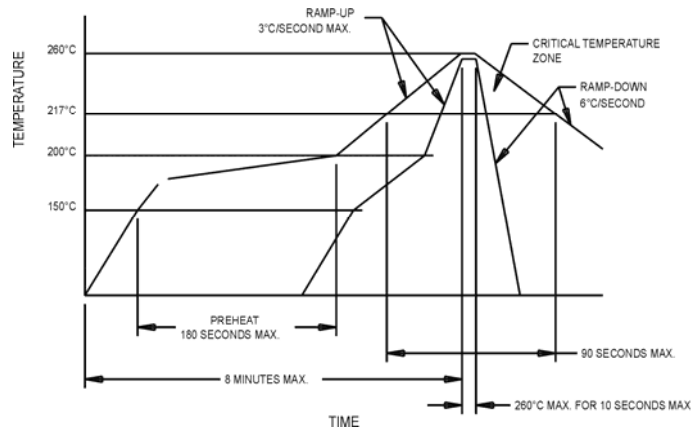
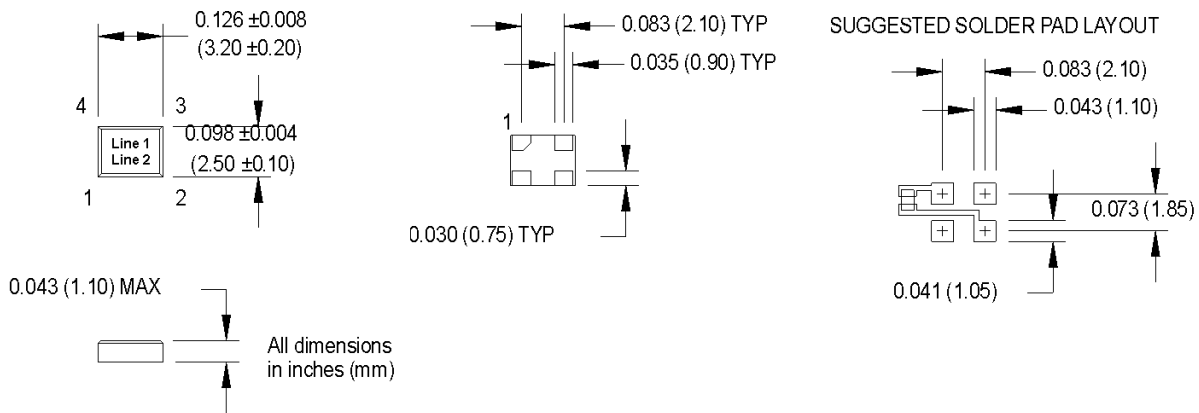


Figure 1

Data Sheet Revision Table:

Date	Rev.	Author	Details of Revision
11/11/13	B	DCO	Corrections to test parameters, marking, and screening mark.
09/23/13	A	LEO	Added Screening, Electrical Test, and Marking sections and minor layout edits.
3/25/13	0	MM	Original release.