


Specification for a Compline Bandpass Filter MtronPTI P/N: 9429R

I. General & Electrical Requirements:

1. Center Frequency (F_0): 1621.25MHz
2. 1dB Bandwidth: 10.5MHz minimum (1616.0MHz to 1626.5MHz)
3. Insertion Loss (@ F_0): 1.0dB maximum
4. Return Loss (within 1616.0MHz to 1626.5MHz): 14.0dB minimum
5. Attenuation (ref. to IL @ F_0)
 - DC to 1559.0MHz: 55dB minimum
 - 1559MHz to 1585MHz: 36dB minimum
 - 1585.0MHz to 1605.0MHz: 18dB minimum
 - 1666MHz to 2500MHz: 28dB minimum
6. Operating Power Level: $\leq +30\text{dBm}$ (1-watt) CW, 10-watts peak (10% duty cycle)
7. Z_{IN}/Z_{OUT} : 50 Ω nominal



II. Environmental & Physical Requirements:

1. Temperature Range:
 - Operating: -40°C to $+85^{\circ}\text{C}$
 - Storage: -55°C to $+95^{\circ}\text{C}$
2. Shock: Per MIL-STD-810(G), Method 516.6, Procedure VI
3. Vibration: Per MIL-STD-810(G), Method 514.6, Category 9
4. Altitude: Operational to 40,000 feet
5. Package:
 - Size: 2.800" (L) x 2.500" (W) x 1.000" (H)
 - Excluding connectors and tuning screws (See Drawing)
 - Connectors: Right Angle SMA-Female (2 places)
 - Materials:
 - Filter Body: Machined aluminum
 - Filter Finish: Silver Plated. Per ASTM B 700/MIL-C-26074, 0.2 to 0.3 mil Electroless Ni, 0.3minimum Silver plate
 - Weight: < 9-ounces

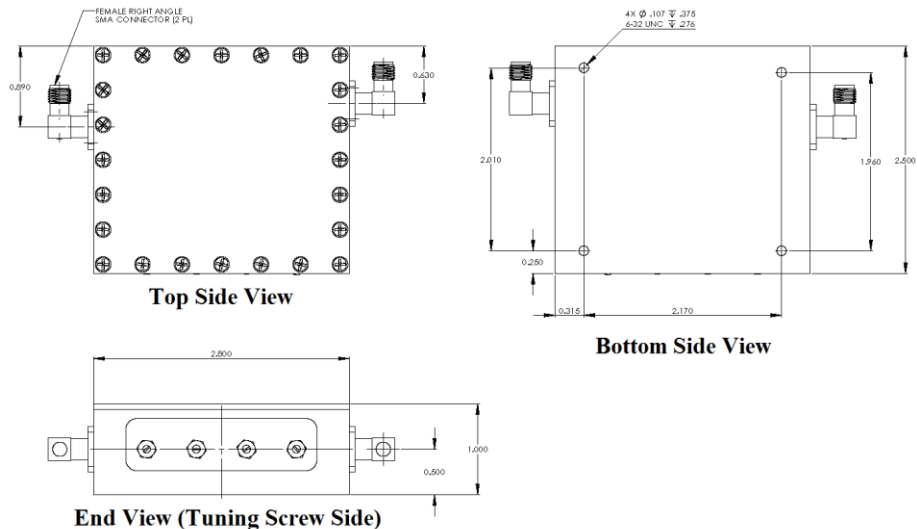

Specification for a Comblines Bandpass Filter MtronPTI P/N: 9429R

III. Design Simulation Plots:

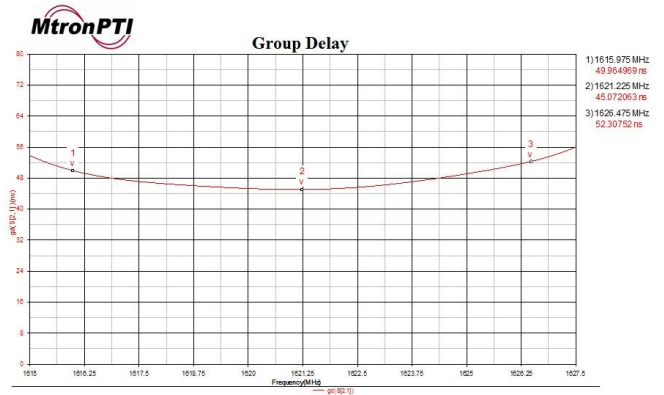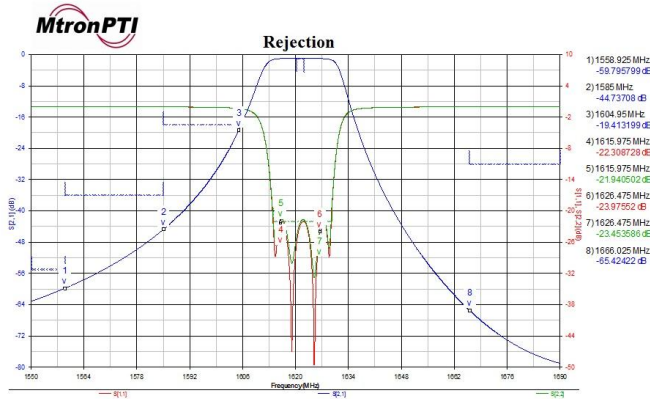

IV. Datasheet Revision Table:

Date	Rev.	Author	Details of Revision
03/08/13	0	BRM	Original Release.