

# K1525C Series

14 pin DIP, 5.0 Volt, CMOS/TTL, VCXO



- Former **Champion Technologies, Inc.** Product
- Phase-Locked Loops (PLL's), Clock Recovery, Reference Signal Tracking, Synthesizers, Frequency Division/Reference

**Ordering Information**

00.0000 MHz

K1525C X X X -R

Product Series \_\_\_\_\_

Model Selection \_\_\_\_\_

A: ±100 - ±150 ppm Pull  
D: ±80 - ±120 ppm Pull

Temperature Range \_\_\_\_\_

Blank: 0°C to +70°C

M: \_\_\_\_\_

Symmetry (Duty Cycle) \_\_\_\_\_



Blank: HCMOS 40%/60%  
C: \_\_\_\_\_ /55%  
T: \_\_\_\_\_ L 45%/55%

S \_\_\_\_\_

R: RoHS compliant part

Frequency (customer specified) \_\_\_\_\_

# OBSOLETE

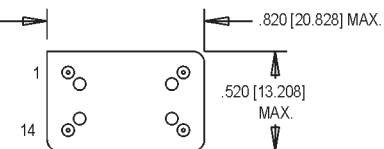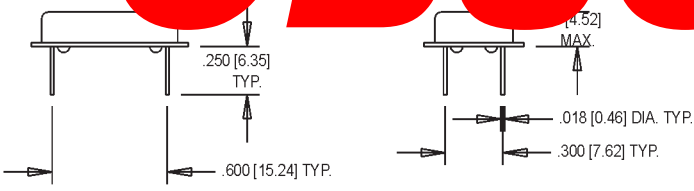

All dimensions in inches [mm].

### Pin Connections

PIN	FUNCTION
1	Voltage Control
7	Ground/Case Ground
8	Output
14	+Vdd

PARAMETER	Symbol	Min.	Typ.	Max.	Units	Condition/Notes
Frequency Range	F	2		55	MHz	
Operating Temperature	T <sub>A</sub>	(See Ordering Information)				
Storage Temperature	T <sub>s</sub>	-40		+125	°C	
Frequency Stability Overall	ΔF/F	Inclusive of Calibration, Temperature, Voltage, Load, and Aging				
0°C to +70°C				±25	ppm	
-40°C to +85°C				±50	ppm	
Aging 1st Year		-3		+3	ppm	
Thereafter (per year)		-1		+1	ppm	
Pullability/APR		(See Ordering Information)				
Control Voltage	V <sub>c</sub>	0.5	2.5	4.5	V	
Linearity				10	%	Positive Monotonic Slope
Modulation Bandwidth	f <sub>m</sub>	20			kHz	±3dB
Input Impedance	Z <sub>in</sub>	50k			Ohms	@ 10 kHz
Input Voltage	V <sub>dd</sub>	4.5	5.0	5.5	V	
Input Current	I <sub>dd</sub>			26	mA	
Output Type						HCMOS/TTL
Load		5 TTL or 15 pF HCMOS				See Note 1
Symmetry (Duty Cycle)		(See Ordering Information)				See Note 2
Logic "1" Level	V <sub>oh</sub>	4.5			V	
Logic "0" Level	V <sub>ol</sub>			0.5	V	
Output Current				±16	mA	
Rise/Fall Time	T <sub>r</sub> /T <sub>f</sub>			4	ns	
Start up Time				10	ms	
Phase Jitter@ 26 MHz	φ <sub>J</sub>		4		ps RMS	Integrated 12 kHz - 20 MHz
Phase Noise (Typical) @ 26 MHz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	Offset from carrier
	-65	-95	-120	-130	-140	dBc/Hz

1. TTL load - see load circuit diagram #1. HCMOS load - see load circuit diagram #2.2  
2. Maximum Wave Soldering Conditions: +260 °C for 10 secs.

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see [www.mtronpti.com](http://www.mtronpti.com) for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.