

SPECIFICATION FOR SMT OSCILLATOR

MtronPTI P/N M2002S563




I. GENERAL & ELECTRICAL REQUIREMENTS:

1. FREQUENCY: 3.686400 MHz to 40.000000 MHz
2. FREQUENCY STABILITY: ± 100 ppm
3. OPERATING TEMPERATURE RANGE: -55°C to $+125^{\circ}\text{C}$
4. OPERATING VOLTAGE (V_{dd}): 3.3 V \pm 0.3V
5. OPERATING CURRENT: 3.6864 MHz to 20.000 MHz 10 mA max.
20.001 MHz to 40.000 MHz 20 mA max.
6. OUTPUT TYPE: HCMOS/TTL Compatible
7. SYMMETRY: 40/60% ref. to $\frac{1}{2}$ V_{dd}
8. RISE/FALL TIME: 6 nS max. ref. between 10% and 90%
9. OUTPUT LOGIC LEVELS: V_{OL} = 10% V_{dd} max. V_{OH} = 90% V_{dd} min.
10. OUTPUT LOAD: 15 pF max.
11. JITTER (Cycle-to-Cycle): 15 pS RMS max. 1 Sigma
12. TRISTATE FUNCTION (Pad 1): Logic "high" or "floating", clock signal output
Logic "low", output disables to high impedance state
13. TRISTATE INPUT CURRENT (Pad 1): 100 μ A max.
14. START-UP TIME: 8.5 mS max. under load and over operating temperature.

II. ENVIRONMENTAL & MECHANICAL REQUIREMENTS:

1. SHOCK: MIL-STD-202, Method 213, Condition C.
2. VIBRATION: MIL-STD-202, Methods 201 & 204.
3. EARLY FAILURE RATE: 400 ppm max.
4. LONG TERM RELIABILITY: 75 FIT @ $+45^{\circ}\text{C}$
5. HERMETICITY: 1×10^{-8} atm cc/sec min.
6. SOLDERABILITY: Per EIAJ-STD-002
7. REFLOW SOLDER CONDITIONS: See Figure 1
8. PACKAGE: 4 - Pad leadless ceramic package. RoHS compliant.

Figure 1

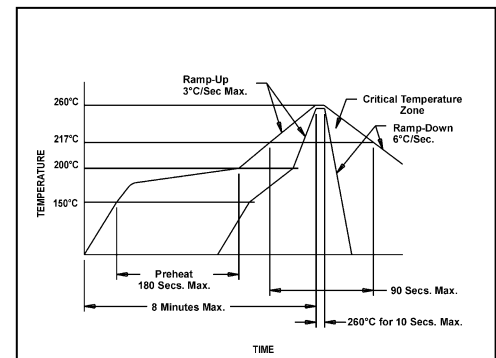

DIMENSIONS

